




D-530-75

D-540-100

D-555-100



D-630-75

D-640-100

D-655-100

十字螺丝刀 +

型号	前端尺寸	全长 mm	轴长 mm	轴径 mm ϕ	手柄直径 mm ϕ	重量 g
D-530-75	$\oplus$ No.00	124	75	3.0	15.4	9
D-540-100	$\oplus$ No.0	178		4.0	19.8	25
D-550-100	$\oplus$ No.1	200	100	5.0	30.0	57
D-555-100	$\oplus$ No.2	410	300	6.0	33.5	124

一字螺丝刀 -

型号	前端尺寸	全长 mm	轴长 mm	轴径 mm ϕ	手柄直径 mm ϕ	重量 g
D-630-75	$\ominus$ 2.5 $\times$ 0.35	124	75	3.0	15.4	9
D-630-100		149				10
D-640-100	$\ominus$ 4.0 $\times$ 0.45	178	100	4.0	19.8	25
D-650-100	$\ominus$ 5.0 $\times$ 0.7	200		5.0	30.0	57
D-655-100	$\ominus$ 5.5 $\times$ 0.8					



D-332-100

D-332-150

D-331-100

D-331-150

电工螺丝刀 + -

型号	前端尺寸	全长 mm	轴长 mm	轴径 mm ϕ	手柄直径 mm ϕ	重量 g
D-331-100	$\ominus$ 6.0 $\times$ 1.0	200	100	6.4	40	120
D-331-150		250	150			130
D-332-100	$\oplus$ No.2	200	100			120
D-332-150		250	150			130



W-91



W-96



W-99



W-98

折叠起来的图片

六角扳手套装明细 / 尺寸 (W-91/96/98/99)



型号	尺寸 (不包括W-98)	A	8	10	14	12	13	12	17	15	20	20	25	—	28	32	36	40	本数	重量 g
	对边尺寸 mm	B	34	34	46	52	47	58	56	60	65	60	72	—	80	90	100	112		
	六角螺栓	S	0.71	0.89	1.27 (1/20")	1.5	1.6 (1/16")	2.0	2.4 (3/32")	2.5	3.0	3.2 (1/8")	4.0	4.8 (3/16")	5.0	6.0	8.0	10.0		
	六角螺丝		M1.4/ 1.6/1.8	M2	M2.5	M3	No.5/6	M4	No.10	M5	M6	1/4"	M8	3/8"	M10	M12/14	M16	M18/20		
W-91					●	●	●	●	●		●	●							7 pieces	23
W-96					●	●	●	●	●	●	●	●	●	●	●	●	●	●	9 pieces	240
W-98					●	●	●	●	●	●	●	●	●	●					10 pieces	115
W-99		●	●	●	●	●	●	●	●	●	●	●	●	●					9 pieces	32

HOZAN TOOL INDUSTRIAL CO.,LTD.

1-2-12 Saiwaicho Naniwa-ku Osaka 556-0021, Japan

<https://www.hozan.co.jp/china/> E-mail :info@hozan.co.jp

HOZAN

提 | 供 | 一 | 流 | 的 | 劳 | 动 | 环 | 境
Improving Your Workspacecatalog of tools
for electronics

2019



NEW FACE 2019

PP-105
镊子

PP-104
镊子

P-86-300
镊子

P-32
小型斜口剪钳

B-713
工具包

B-714
工具包

B-723
工具包

F-301
防静电椅套

F-128
接地线

Polypropylene + Elastomer

ESD软芯片镊子

P-640-J



P-643-J



HDPE

非粘性芯片镊子

P-643-N

P-645-N

PBT

塑料尖头镊子

P-640-P

P-644-P

PEEK

ESD芯片镊子



P-643-S

P-640-S

P-641-S

P-642-S

P-644-S

P-645-S

P-650-S

Zirconia ceramic


ESD陶瓷镊子


P-646-D



P-646-C
陶瓷镊子

机身支持所有芯片!!

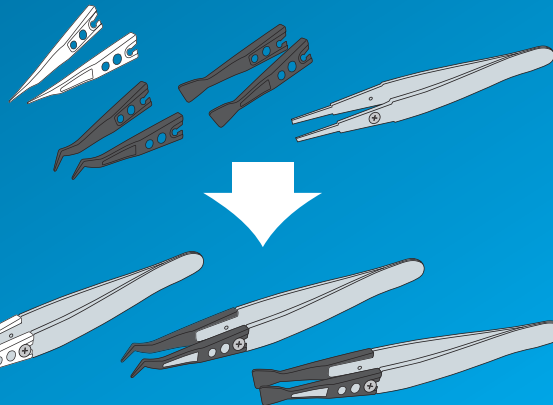

型号	尖端宽 					材質		镊子头颜色	耐热温度℃ (镊子头)	ESD管理值 Ω	重量 g	
	A	B	C	D	尖端宽 (mm)	镊子头	本体					
P-640-J	125	48	10	10	1.5	Polypropylene + Elastomer	不锈钢 (SUS420J2)	黑+灰	80	Rg<1×10 ¹²	17	
P-643-J					3.0			HDPE				白 (Translucent)
P-643-N					123				46	2.4		
P-645-N					125			48	6.0			
P-640-S	125	48			1.2	PEEK		铝	黑	315		Rg<1×10 ¹²
P-641-S					0.4							
P-642-S					1.0							
P-643-S					124							
P-644-S					0.6							
P-645-S					6.0							
P-650-S	125	48			1.2	PBT	不锈钢 (SUS420J2)		白	220	—	
P-640-P					0.6							
P-644-P			0.8	Zirconia ceramic		白	1200		—			
P-646-D					128					51		
P-646-C	127	50										

尖端可交换镊子